




## SPECIFICATIONS

型号名称	G5060-8V3
显示芯片	NVIDIA® GeForce RTX™ 5060
显存	8GB GDDR7
显存位宽	128-bit
核心频率	Extreme Performance: 2512 MHz (MSI Center) Boost: 2497 MHz
显存速度	28 Gbps
Marketing Name	GeForce RTX™ 5060 8G VENTUS 3X
最大屏幕输出数	4
最大分辨率	7680 x 4320
输出接口	DisplayPort x 3 (v2.1b) HDMI™ x 1 (As specified in HDMI™ 2.1b: up to 4K 480Hz or 8K 120Hz with DSC, Gaming VRR, HDR)
HDCP 支持	Y
显卡功耗	145 W
建议电源 (W)	550 W
供电接口	8-pin x1
DirectX 版本支持	12 Ultimate
OpenGL 版本支持	4.6
显卡尺寸	303 x 121 x 41 mm
重量(显卡/包装盒)	684 g / 1042 g

## CONNECTIONS

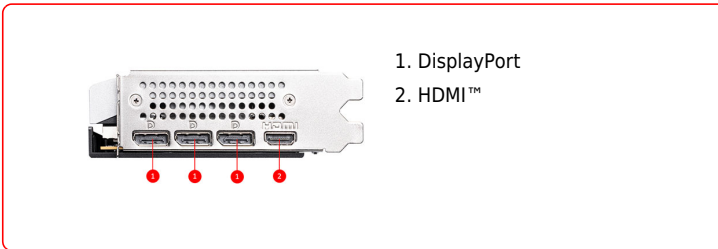

## FEATURES



### Triple Fan

Three fans and a huge heatsink ensure a cool and quiet experience for you.



### TORX FAN 5.0

Fan blades linked by ring arcs and a fan cowl work together to stabilize and maintain high-pressure airflow.



### Nickel-plated Copper Baseplate

Heat from the GPU and memory is swiftly captured by a nickel-plated copper baseplate and transferred.




### Core Pipes

Core Pipes feature a square design to maximize contact with the GPU baseplate for optimal thermal management.




### Reinforcing Backplate

The reinforcing backplate features a flow-through design that provides additional ventilation.



### Zero Frozr

The fans completely stop when temperatures are relatively low, eliminating all noise.



### DrMOS

DrMOS power stage solutions provide great efficiency with low power loss and enhanced voltage controls.



### Fuse

Additional fuses built into the custom PCB provide additional safeguards against electrical damage.



### MSI Center

The exclusive MSI Center software lets you monitor, tweak and optimize MSI products in real-time.



### Afterburner

Take full control with the most recognized and widely used graphics card overlocking software in the world.