


## SPECIFICATIONS

<b>Model Name</b>	B760M BOMBER
<b>CPU Support</b>	Supports 12 <sup>th</sup> / 13 <sup>th</sup> Gen Intel® Core™ Processors, Pentium® Gold and Celeron® Processors
<b>CPU Socket</b>	LGA 1700
<b>Chipset</b>	Intel® B760 Chipset
<b>Expansion Slots</b>	1x PCIe 4.0 x16 slot 1x PCIe 4.0 x1 slot
<b>Display Interface</b>	Support 4K@60Hz as specified in HDMI™ 2.1, DisplayPort 1.4, VGA - Requires Processor Graphics
<b>Memory Support</b>	2 DIMMs, Dual Channel DDR5-6400+MHz(OC)
<b>Storage</b>	2x M.2 Gen4 x4 64Gbps slots, 4x SATA 6Gbps ports
<b>USB ports</b>	6x USB 3.2 Gen 1 5Gbps (6 Type-A), 6x USB 2.0
<b>LAN</b>	Realtek® RTL8125B 2.5G LAN
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost

## FEATURES

- Latest DDR5 Memory**  
 A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.
- EZ Debug LED**  
 Easiest way to troubleshoot.
- Frozr AI Cooling**  
 Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.
- Core Boost**  
 With premium layout and fully digital power design to support more cores and provide better performance.
- Memory Boost**  
 Advanced technology to deliver pure data signals for the best performance, stability and compatibility.
- Lightning Gen4 Solution**  
 The latest Gen4 PCI-E and M.2 solution with up to 64GB/s bandwidth for maximum transfer speed.
- PCI-E Steel Armor**  
 Protecting VGA cards against bending and EMI.
- Audio Boost**  
 Reward your ears with studio grade sound quality for the most immersive audio experience.

## CONNECTIONS

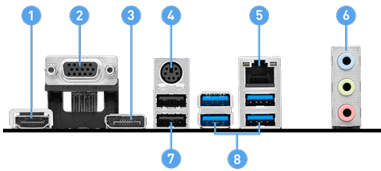

- |                |                               |
|----------------|-------------------------------|
| 1. HDMI™       | 2. VGA                        |
| 3. DisplayPort | 4. Keyboard / Mouse           |
| 5. LAN port    | 6. Audio Connectors           |
| 7. USB 2.0     | 8. USB 3.2 Gen 1 5Gbps Type-A |