



## FEATURES


### wifi 6 B

The latest wireless solution supports MU-MIMO and BSS color technology, delivering speeds up to 2400Mbps.

## SPECIFICATIONS

<b>Model Name</b>	Creator X299
<b>CPU Support</b>	Supports Intel® Core™ X-Series Processor 10000/9000/78xx(above)series for LGA2066 Socket
<b>CPU Socket</b>	LGA 2066
<b>Chipset</b>	Intel® X299 Chipset
<b>Graphics Interface</b>	4 x PCI-E 3.0 x16 slots 4-way AMD® CrossFire™ Support 4-way NVIDIA® SLI™
<b>Memory Support</b>	8 DIMMs, Quad Channel, DDR4-4266MHz (OC)
<b>Storage</b>	3 x Turbo M.2 slots 32Gb/s, supports Intel® Optane™ Technology 1 x U.2 slot 32Gb/s 8 x SATA 6Gb/s
<b>USB Ports</b>	1 x USB 3.2 (Gen2 x2, 20G, Type-C) + 1 x USB 3.2 Gen2 (Type-C) + 11 x USB 3.2 (Gen1, Type-A) + 6 x USB 2.0
<b>LAN</b>	Aquantia AQC107 10G LAN + Intel® I219v Gigabit LAN
<b>Wireless / BT</b>	Intel® Wi-Fi 6 AX200, Bluetooth 5.0
<b>Audio</b>	8-Channel (7.1) HD Audio with Audio Boost 4

## CONNECTIONS

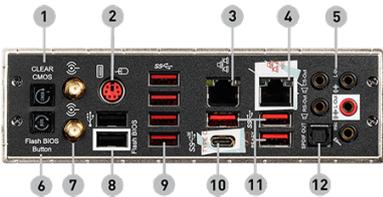

- |                         |                               |
|-------------------------|-------------------------------|
| 1. Clear CMOS Button    | 2. Keyboard / Mouse           |
| 3. Gigabit LAN          | 4. 10G LAN                    |
| 5. Audio Connectors     | 6. Flash BIOS Button          |
| 7. Wireless / Bluetooth | 8. USB 2.0                    |
| 9. USB 3.2 Gen1 Type-A  | 10. USB 3.2 Gen2x2 20G Type-C |
| 11. USB 3.2 Gen1 Type-A | 12. Optical S/PDIF out        |